







**Travel Jewelry Pouch**

**Seam Allowance is 1/4"**  
**Notions:**  
- 1/4 yard of heavyweight fusible interfacing  
- 2 yards of ribbon or 1/4" double-fold bias tape  
- Optional - decorative cord ends of your choosing, instead of leaf cord ends.

**PRELIMINARY STEPS**  
1. Read through all instructions carefully before beginning.  
2. Cut out all pattern pieces along outer dash lines.  
3. Cut 1/2" radius of heavyweight fusible interfacing to give a circle measuring 2" across.




**OUTER FLOWER POUCH**  
1. Sew button holes as per marking. Snip open.  
2. With right sides together, pin the 2 large circles together. Stitch around the outer edge, close to the outer line, leaving a gap open for turning, where indicated.  
3. Clip notches out of the seam allowance to remove some of the bulk, careful not to snip through the stitches.



**POCKETS**  
1. Attach circle of heavyweight interfacing to the center of "Front of Pocket" small circle on the wrong side of fabric.  
2. Iron in place.  
3. With right sides together, pin the 2 small circles together. Stitch around the outer edge, leaving a gap open for turning where indicated.  
3. Clip notches out of the seam allowance to remove some of the bulk, careful not to snip through the stitches.

**ATTACHING POCKETS**  
1. Turn both circles right sides out, press with iron, and topstitch the opening closed and continue all around sewing close to the edge.  
2. To attach the two circles together, place the small circle onto the lining of the large circle, matching the corner points.  
3. Sew over the interfaced circle stitching line to form the bottom of the pockets to avoid fabric slipping through later.  
4. Stitch the marked lines from outer edge of the small circle, stopping at the dash line of the outer circle. Be sure to backstitch as these lines will experience some tension when used as pockets.

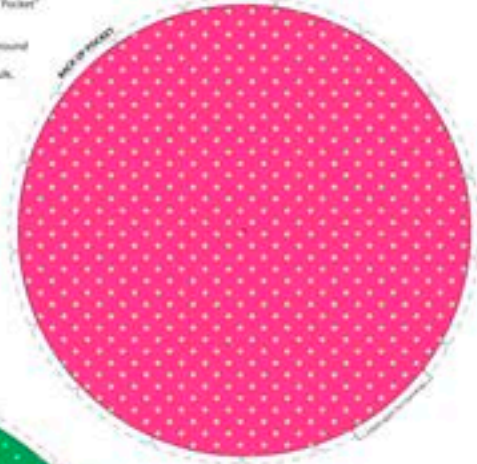

**STITCHING CHANNEL FOR DRAINCORD**  
1. Sewing on the large circle only.  
2. Sew a second circular line 3/4" from that line thereby enclosing the buttonhole. Be careful not to catch the inner circle fabric, or you will "lose" the pockets.  
3. Thread the ribbon through the channel twice using a safety pin.  
4. Attach the ends together and work the open ends through the channel.  
5. Pull one cord from each buttonhole to close the pouch.

**LEAF CORD ENDS**  
1. Fold in half, right sides together.  
2. Pin and stitch along lines, leaving opening for turning, careful to "backstitch" needle-foot to ensure sharp corners.  
3. Turn inside out and fill tightly with stuffing (if desired).  
4. Cut cord end to desired length.  
5. Insert leaf cord ends into the opening in the leaf. Stitch and backstitch close to edge to secure in place. Knot "house down".



27814 X (Multi) Travel Jewelry Pouch Panel (24")





**Take-Along Tote**

**Notions:**  
- 1/4 yard of heavyweight fusible interfacing  
- 2 yards of ribbon or 1/4" double-fold bias tape  
- Optional - decorative cord ends of your choosing, instead of leaf cord ends.

**PRELIMINARY STEPS**  
1. Read through all instructions carefully before beginning.  
2. Cut out all pattern pieces along outer dash lines.  
3. Cut 1/2" radius of heavyweight fusible interfacing to give a circle measuring 2" across.

**POCKETS**  
1. Attach circle of heavyweight interfacing to the center of "Front of Pocket" small circle on the wrong side of fabric.  
2. Iron in place.  
3. With right sides together, pin the 2 small circles together. Stitch around the outer edge, leaving a gap open for turning where indicated.  
3. Clip notches out of the seam allowance to remove some of the bulk, careful not to snip through the stitches.

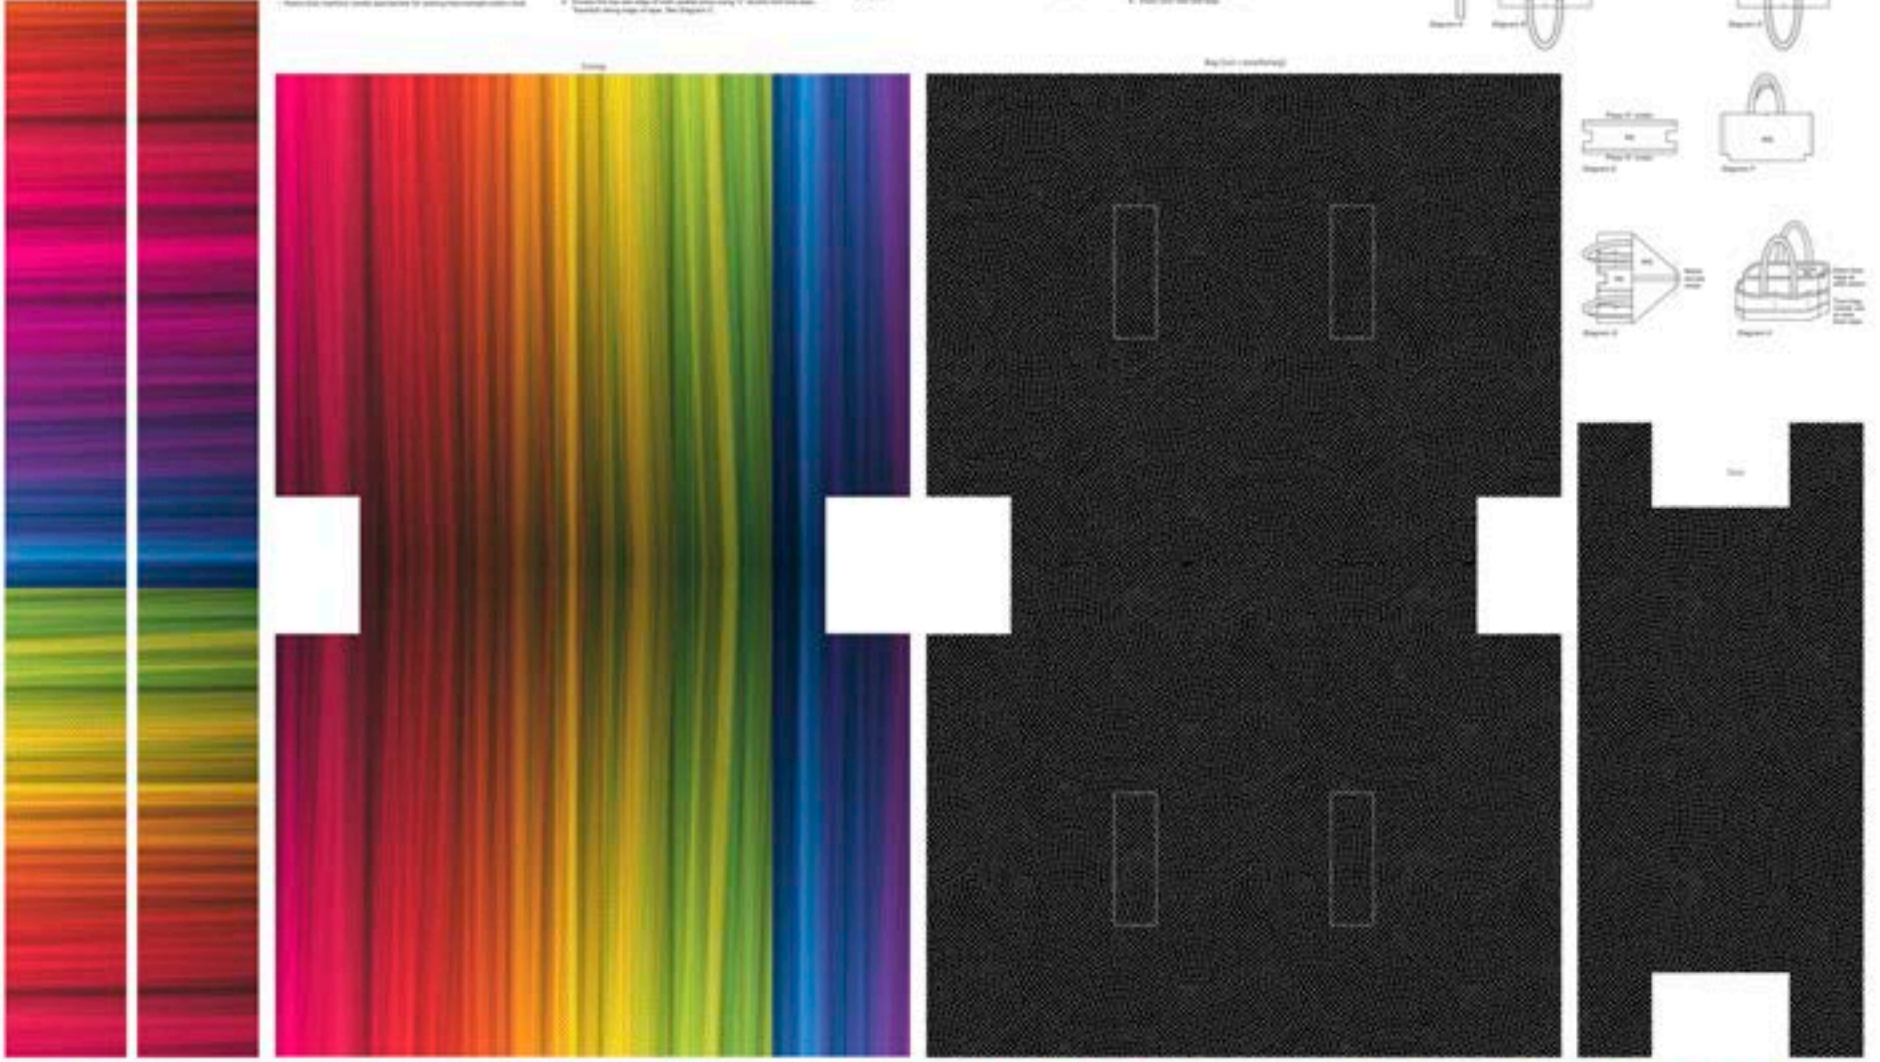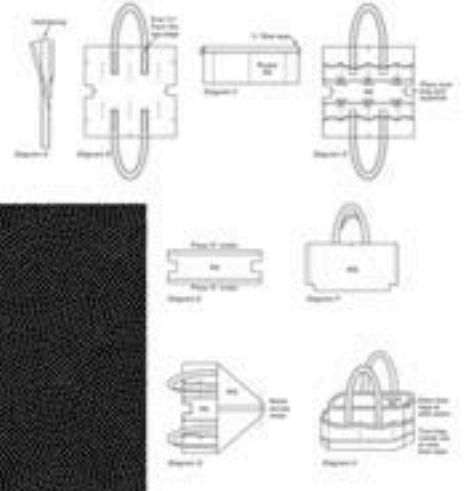

27815 X (Multi) Take-Along Tote Panel (36")

