

Sew & Go XIV



Daisy Doll
Finished Size approximately 24" h



Ellie May Pig
Finished size approximately
17" x 8" w x 10" h





Seam Allowance is 1/4" unless otherwise noted.

Notions:
- Iron
- Polyfill
- (optional) Beads for the eyes
- (optional) 2" x 2" piece of fusible interfacing for the nose


Preliminary Steps:
1. Read through all instructions carefully before beginning.
2. Cut out all pattern pieces along outer edge.

Tail:
1. Fold narrow end down, iron, wrong sides together.
2. Iron side seam allowance down, wrong sides together.
3. Pin and top stitch along edge.

Body:
1. Sew groin darts by pinning right sides together along dotted line. Machine stitch along line, sewing fat-end to skinny-back.
2. With right sides together, pin then stitch belly to each of the sides (left side and right side), matching S, F, G, H.
3. Pin and stitch D to E, then L, J, A and make sure to sandwich the tail, matching all J, D's, H's, I's and F's when sewing. See diagrams.

Body Continued:
1. Clip notches and corners where indicated.
2. Turn right side out and stuff generously with polyfill.
3. Slip stitch closed. See diagram.
4. Tie a knot in the tail (optional).

Ear:
1. With right sides together, fold in half, press and stitch along side.
2. Clip notches and trim corner.
3. Turn right side out and press, also turn open end inside 1/2" and press. Top stitch all around.
4. Adjust your machine stitch to baste and baste the bottom of the ear 1/2" up from the edge.
5. Pull bobbie thread to gather. See diagram.
6. Top stitch 3/8" from edge.
7. Pin to head where small "X" is indicated. Stitch into place.

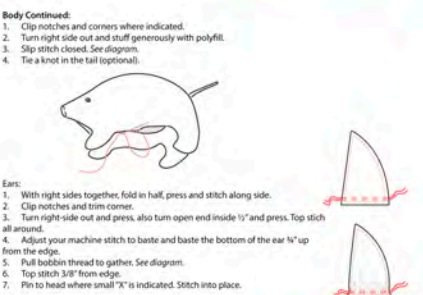

28128 P (PINK) ELLIE MAY PIG STUFFABLE PANEL (36")



28129 W (DENIM) DAISY DOLL CRAFT PANEL (36")

PRELIMINARY STEPS:
1. Read through all instructions carefully before beginning.
2. Cut out all pattern pieces along outer edge.
3. Press all pieces.

BOOTS:
1. With right sides together, pin body front to body back. Stitch, leaving lower edge open (Diagram B).
2. Clip curves and trim seams. Turn body right side out.
3. Turn seam allowance of lower edge of body to the inside measuring 1/2" and slip stitch.

SOCKS:
1. Pin toe and heel sections right sides together. Stitch leaving top edge open.
2. Clip curves and trim seams. Turn leg right side out.
3. Slip stitch toe and heel sections with remaining leg section.
4. Turn top of leg to the outside, match, baste in place.
5. Repeat procedure with remaining leg section.
6. Repeat procedure with remaining toe and heel sections.

HAIR:
1. Pin toe and heel sections right sides together. Stitch, leaving lower edge open.
2. Clip curves and trim seams. Turn hair right side out through opening.
3. Turn hair right side out and press, also turn open end inside 1/2" and press. Top stitch all around.
4. Adjust your machine stitch to baste and baste the bottom of the hair 1/2" up from the edge.
5. Pull bobbie thread to gather. See diagram.
6. Top stitch 3/8" from edge.
7. Pin to head where small "X" is indicated. Stitch into place.

SEAM ALLOWANCE:
1/4" unless otherwise specified.

APPROXIMATE BODIED SIZE: 24"

SKIRT:
1. Pin the skirt ends of skirt right sides together to form a circle. Stitch, leaving lower edge open (Diagram C).
2. Turn skirt right side out and press, also turn open end inside 1/2" and press. Top stitch all around.
3. Turn upper edge of skirt to wrong side measuring 1/2" from raw edge.
4. Repeat procedure with remaining skirt section.