


46½" x 54½"







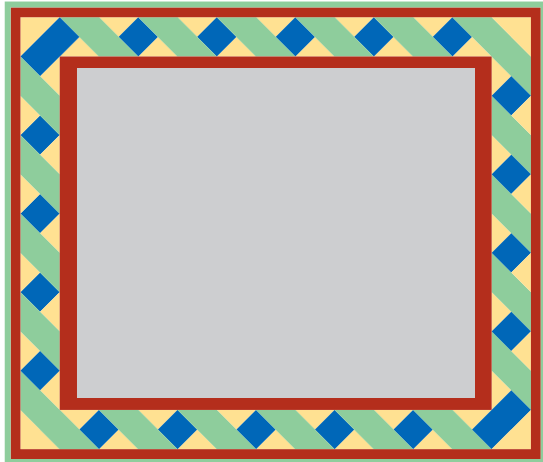

Designed by: Cyndi Hershey

Menga



Finished Size: 46½" x 54½"

FABRIC REQUIREMENTS

	<p>Fabric A 30411 X (1) 36" PANEL</p> <p>1 BOLT</p>		<p>Fabric B* 30414 Y 1 YARD</p> <p>1 BOLT</p>		<p>Fabric C 30414 N ¾ YARD</p> <p>1 BOLT</p>		<p>Fabric D 30416 R ½ YARD</p> <p>1 BOLT</p>
	<p>Fabric E 27935 EZ ¾ YARD</p> <p>1 BOLT</p>		<p>Backing** 30412 N 3 YARDS</p> <p>3 BOLTS</p>	<p>* includes binding ** backing only</p>			

* Numbers within gray box = Number of Bolts needed to make 12 Kits

We recommend that you carefully read through all instructions before starting your project.

CUTTING DIRECTIONS

Note:

WOF= Width of Fabric (perpendicular to the selvages).

Fabric A

- Cut panel 41" x 34".

Fabric B

- Cut (3) $4\frac{7}{8}$ " x WOF strips; subcut (21) $4\frac{7}{8}$ " squares. Cut squares diagonally in half diagonally to yield 42 half-square triangles (HST).
- Cut (6) $2\frac{1}{2}$ " strips for binding.

Fabric C

- Cut (2) $5\frac{1}{4}$ " x WOF strips; subcut (10) $5\frac{1}{4}$ " squares and (1) $4\frac{7}{8}$ " square. Cut the $5\frac{1}{4}$ " squares diagonally in both directions to yield 40 quarter-square triangles (QST). Cut the $4\frac{7}{8}$ " square diagonally in half to yield 2 HST.

Fabric D

- Cut (2) $2\frac{1}{4}$ " x WOF strips; subcut (2) $2\frac{1}{4}$ " x $36\frac{1}{2}$ " side border strips.
- Cut (2) $1\frac{3}{4}$ " x WOF strips; subcut (2) $1\frac{3}{4}$ " x 41" top and bottom border strips.
- Cut (5) $1\frac{1}{2}$ " x WOF strips. Sew together end to end with diagonal seams; press. Cut (2) $1\frac{1}{2}$ " x $46\frac{1}{2}$ " strips and (2) $1\frac{1}{2}$ " x $52\frac{1}{2}$ " strips.

Fabric E

- Cut (2) $5\frac{1}{4}$ " x WOF strips; subcut (10) $5\frac{1}{4}$ " squares and (2) $4\frac{7}{8}$ " squares. Cut the $5\frac{1}{4}$ " squares diagonally in both directions to yield 40 QST. Cut the $4\frac{7}{8}$ " squares in half diagonally to yield 4 HST.

CONSTRUCTION

All measurements include $\frac{1}{4}$ " seam allowances.

1. Sew the (D) $1\frac{3}{4}$ " x 41" strips to the top and bottom of the panel. Press toward the strips. Sew the $2\frac{1}{4}$ " x $36\frac{1}{2}$ " (D) strips to the sides of the panel. Press.
2. Sew 1 (C) QST to 1 (E) QST triangle as shown. Press toward the (C) triangle. Make 22 units.




Make 22

3. Sew 1 (B) HST to one unit from step 2. Press toward the (B) triangle. Make 22 top/bottom border units.



Make 22

4. Sew 1 (C) QST to one (E) QST as shown. Press toward the (C) triangle. Make 18 units.



Make 18

5. Sew 1 (B) HST to 1 unit from step 4. Press toward the (B) triangle. Make 18 side border units.




Make 18

6. Sew 1 (C) HST to 1 (E) HST triangle. Press toward the (C) triangle. Make 2 corner units.



Make 2

7. Sew 1 (B) HST to 1 (E) HST. Press toward the (B) triangle. Make 2 corner units.



Make 2

8. Sew 11 top/bottom border units together as shown to make top border. Press. Repeat to make bottom border.



9. Sew 9 side border units together as shown to make a side border. Press. Make 2.




Make 2

10. Sew 1 of each corner unit to each side border as shown. Press toward the corner units. Make 2.



Make 2

11. Sew the top and bottom borders to the quilt, and press toward the inner borders. Sew the side borders to the quilt; press toward the inner borders.

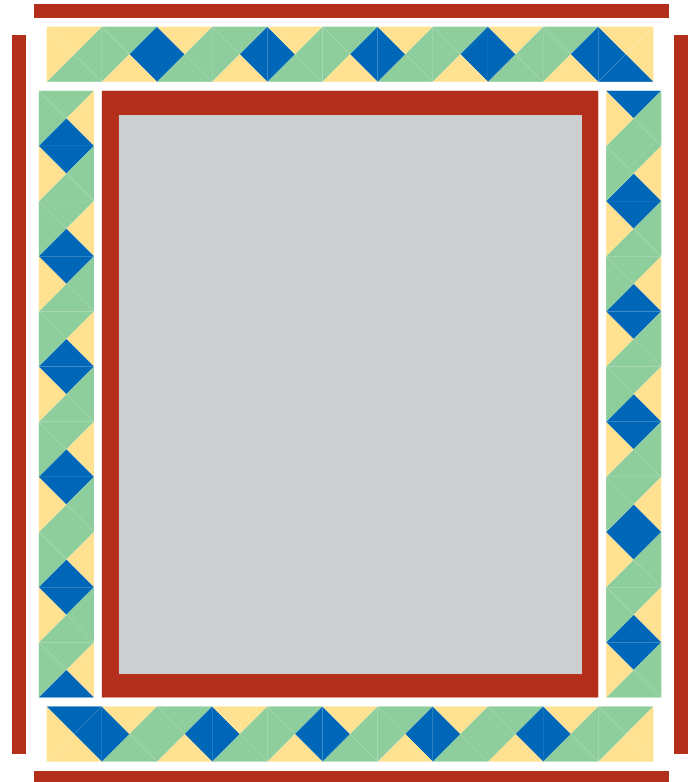

12. Sew the 1½" x 52½" red strips to the top and bottom of the quilt. Press toward the strips. Sew the 1½" x 46½" (D) strips to the sides of the quilt; press.

FINISHING

1. Prepare backing and press. Layer backing, batting, and quilt top. Quilt as desired.
2. Trim layers even with quilt top.
3. Prepare binding using the (B) 2½" strips. Sew binding to quilt using your preferred method.

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.