


SIZE 20" x 37"

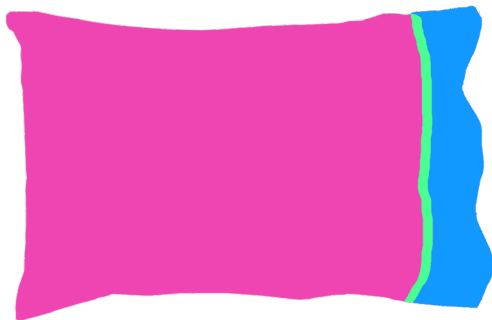

FABRIC REQUIREMENTS

	<p>Fabric A 29709 A ¾ YARD 1 BOLT</p>		<p>Fabric B 29711 B ⅓ YARD 1 BOLT</p>		<p>Fabric C 29710S ⅛ YARD 1 BOLT</p>	
--	---	--	---	--	--	--

Information within gray box = Number of Bolts or Packs needed to make 12 Kits

BY EVA NIKOLSKAYA
FOR JQL LICENSING

We recommend that you carefully read through all instructions before getting started on your project.

CUTTING DIRECTIONS

Fabric A (pillowcase body), cut:

- (1) 27" x 41" (trim selvedge ends only)

Fabric B (top band), cut:

- (1) 12" x 41"

Fabric C (accent strip), cut:

- (1) 1½" to 3" x 41" (depending on how wide you want it to be)

CONSTRUCTION

1. Press **Fabric C** in half lengthwise, wrong sides together. Pin the folded **Fabric C** strip to the right side of the **Fabric A** along one 41" side, raw edges matching and sew through all layers ½" from edge. If your main fabric is directional, please consider which end is "up.") Sew the side seam with serger or French seam (see instructions for *How to Make a French Seam* below). Sew the bottom with the serger or French seam.

2. Sew the short side of **Fabric B** correct sides together with a ½" seam, forming a circle.

3. Pin the correct side of **Fabric B** to the wrong side of the case and sew with a ½" seam.

4. Turn under raw edge ½" and press. Turn to right side of case and align folded edge over top of previous stitching. Top stitch in place.

HOW TO MAKE A FRENCH SEAM

1. To make a French seam place the fabric wrong sides together and sew a ⅛" seam. Turn and press on seam with right sides together, then sew a ⅜" seam. This will encase the raw edge and give a nice finish to the inside of the case.