

50½" x 56½"









Designed By: Cyndi Hershey


Designed by: Cyndi Hershey



FABRIC REQUIREMENTS

	Fabric A 29707 X (1) 36" PANEL		Fabric B* 9000 BLACK 1 YARD		Fabric C 23528 G ½ YARD		Fabric D 29711 B ½ YARD
	1 BOLT		1 BOLT		1 BOLT		1 BOLT
	Fabric E 29711 W ¾ YARD		Fabric F** 29710 G ¾ YARDS	* includes binding ** backing only ALSO: Quilt batting 57" x 63"			
	1 BOLT		3 BOLTS				

* Numbers within gray box = Number of Bolts needed to make 12 Kits



We recommend that you carefully read through all instructions before starting your project.

3. Sew 2 segments together into a four-patch unit. Press. Make 28 four-patch units.

CUTTING DIRECTIONS

Note:

WOF= Width of Fabric (perpendicular to the selvages)

Fabric A

- Cut panel $\frac{1}{4}$ " beyond edge. This should be approximately 35" x 40 $\frac{1}{2}$ ".

Fabric B, cut:

- (6) 1 $\frac{1}{2}$ " x WOF strips. Sew together end to end with diagonal seams; press. From this, cut (2) 1 $\frac{1}{2}$ " x 50 $\frac{1}{2}$ " strips and (2) 1 $\frac{1}{2}$ " x 54 $\frac{1}{2}$ " strips.
- (4) 2" x WOF strips.
- (6) 2 $\frac{1}{2}$ " x WOF strips for binding.

Fabric C, cut:


- (7) 2" x WOF strips. From one strip, cut (4) 2" squares and (2) 2" x 3 $\frac{1}{2}$ " rectangles.

Fabric D, cut:

- (7) 2" x WOF strips. From one strip, cut (4) 2" squares and (2) 2" x 3 $\frac{1}{2}$ " rectangles.

Fabric E, cut:


- (7) 3 $\frac{1}{2}$ " x WOF strips. From four strips, cut (64) 2" x 3 $\frac{1}{2}$ " rectangles.



Make 28


4. Sew one (C) 2" strip to one side of one (E) 3 $\frac{1}{2}$ " strip. Sew one (D) 2" strip to other side of E strip. Press seams toward the C and D strips. Make 3 strip sets.

5. Cut strip sets into (56) 2" segments.

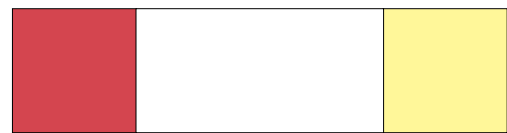

Make 56

6. Sew two (E) 2" x 3 $\frac{1}{2}$ " rectangles to each unit from step 1. Press toward the rectangles. Make 28 units.




Make 28

CONSTRUCTION

All measurements include $\frac{1}{4}$ " seam allowances.


1. Sew one (C) 2" strip to one (D) 2" strip. Press toward the (C) strip. Make 3 strip sets.

2. Cut strip sets into (56) 2" segments.



Make 56

7. Sew 2 segments from step 5 to top and bottom of unit from step 6 as shown. Press toward the top and bottom rows. Make 28 main blocks.




Make 28



8. Sew one (C) 2" x 3½" rectangle with one (D) 2" x 3½" rectangle. Press toward the D rectangle. Make 2 units.


9. Sew 2 (E) 2" x 3½" rectangles to the sides of each unit from step 8.



Make 2

10. Sew one (C) 2" square to one end of one (E) 2" x 3½" rectangle. Press toward the square. Sew one (D) 2" square to the other end of the rectangle. Press toward the square. Make 4 units.

11. Sew one unit from step 10 to the top and bottom of a unit from step 9. Press toward the top and bottom rows. Make two alternate blocks.



Make 2

5. Referring to quilt image for correct placement, sew 8 main blocks together to make the top border. Press. Repeat for the bottom border.

6. Sew top and bottom borders to quilt as shown. Press toward the frame strips.

7. Sew the (B) 1½" x 54½" strips to the sides of the quilt. Press toward the strips. Sew the (B) 1½" x 50½" strips to the top and bottom of the quilt. Press toward the strips.


ASSEMBLY

1. Center and sew 2 (B) 2" strips to the sides of the panel. Press toward the strips and trim ends even with panel. Center and sew the remaining (B) 2" strips to the top and bottom of the panel. Press toward the strips and trim ends even with the panel.

2. Trim framed panel to 36½" x 42½" keeping panel centered.

3. Referring to quilt image for correct placement, sew 6 main blocks and 1 alternate block together to make a side border. Press. Repeat.

4. Sew side borders to quilt as shown. Press toward the frame strips.

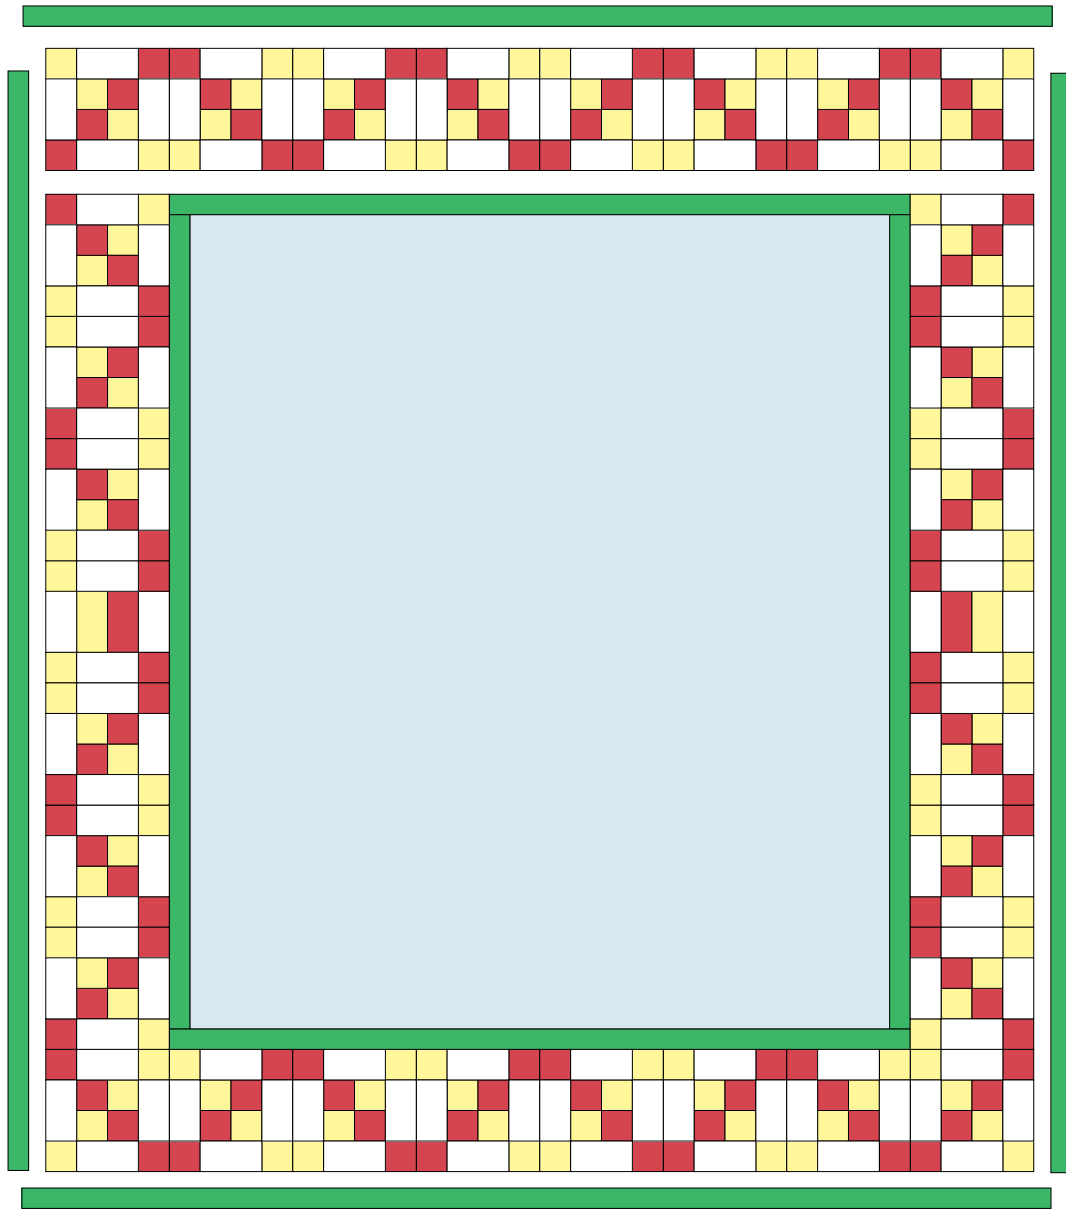

Quilt Assembly Diagram

FINISHING

1. Prepare backing using two widths of fabric and horizontal seam. Press seams open.
2. Layer backing, batting and quilt top. Baste and quilt as desired.
3. Trim layers even with quilt top.
4. Prepare binding using (B) 2½" strips. Sew binding to quilt using your preferred method.

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.