Placemat (makes 4)
SIZE 14" x 18"

Apron
One Size Fits Most

QT fabrics
IMAGINE & CREATE

One Size Fits Most

FABRIC REQUIREMENTS	
	Fabric A **30273 N** 1 YARD
	1 BOLT
	Fabric B **30275 B** 1⅛ YARDS
	2 BOLTS

✱ Numbers within gray box = Number of Bolts needed to make 12 Kits

Designed by: Vicki Niro

We recommend that you carefully read through all instructions before getting started on your project.
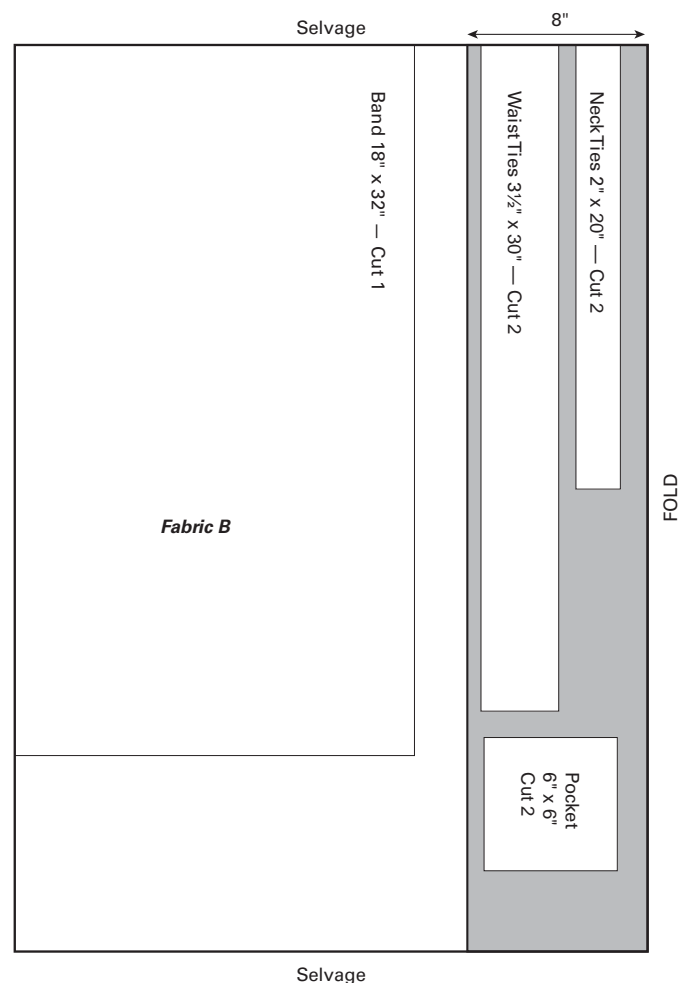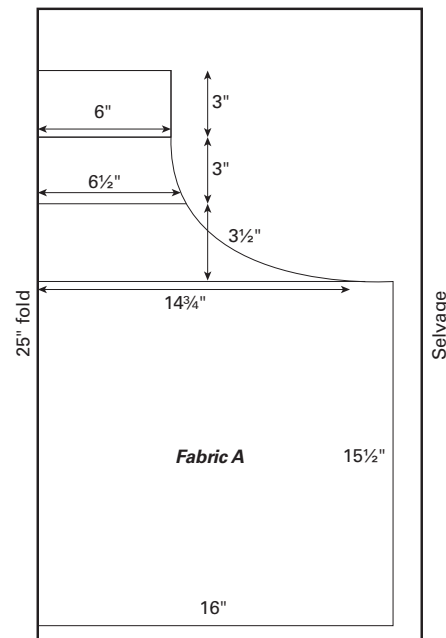
CUTTING DIRECTIONS

Fold Fabric A in half lenthwise, aligning selvage edges. Cut (1) 16" x 25 apron piece on the fold as shown. Trim the arm area referring to the measurements on the diagram.

Place Fabric B right side up. Fold 1 long side over 8" and cut the tie pieces and pockets from the double layered section. Cut the bottom band piece from the single layer section.

SEWING INSTRUCTIONS

1. Fold one tie piece in half lengthwise with right sides together. Stitch along one long side and one short side using a ¼" seam allowance. Turn right side out and press. Repeat with remaining tie pieces.

2. Fold the bottom band in half lengthwise, wrong sides together. Baste the top and side raw edges together.

3. Place on apron piece with band top edge aligned with apron bottom edge. Stitch in place. Press band down with seam toward band. Topstitch ⅛" below top edge of band.

4. Hem the apron top and sides: press the sides ¼" to the wrong side and press ¼" again. Stitch close to the pressed edge. Repeat with the curved sides and top of the apron.

5. Press top of pocket to wrong side ¼" and then ½" again. Topstitch. Press sides and bottom of pocket to wrong side ¼". Pin to apron in desired place. Topstitch to apron. Repeat with second pocket.

6. On wrong side of apron, pin the waist tie to the top waist edge with raw end of tie ¼" from the hemmed apron edge. Stitch in place. Fold the waist tie out over apron edge. Stitch in place on the edge of the apron, encasing the raw end of the tie. Repeat with remaining waist tie.

7. In the same manner, attach the neck ties to the top corners of the apron.

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.

Fabric A diagram:
6"
3"
6½"
3"
3½"
14¾"
25" fold
Selvage
15½"
16"

Fabric B diagram:
Selvage
8"
Band 18" x 32" — Cut 1
Waist Ties 3½" x 30" — Cut 2
Neck Ties 2" x 20" — Cut 2
FOLD
Fabric B
Pocket 6" x 6" Cut 2
Selvage

Designed by: Vicki Niro

Finished Size: 14" x 18"
Makes 4

FABRIC REQUIREMENTS

	Fabric A 30273 N ⅔ YARD		Fabric B 30275 Y ¼ YARD		Fabric C 30274 Y ¼ YARD
	1 BOLT		1 BOLT		1 BOLT
	Fabric D 30274 Z ¼ YARD		Fabric E 30275 N ¼ YARD		Fabric F 29008 SK ⅞ YARD*
	1 BOLT		1 BOLT		1 BOLT
	Fabric G 30273 Z 1⅛ YARDS**	* includes Binding		** Backing only	
	2 BOLTS				

✱ Numbers within gray box = Number of Bolts needed to make 12 Kits

We recommend that you carefully read through all instructions before getting started on your project.

CUTTING DIRECTIONS

WOF = Width of fabric

Fabric A, cut
- (2) 9½" x WOF strips.
  Subcut (4) rectangles 9½" x 13½".

Fabric B, cut
- (2) 2 ½" x WOF strips.
  Subcut (28) 2½" x 2½" squares.

Fabric C, cut
- (2) 2 ½" x WOF strips.
  Subcut (28) 2½" x 2½" squares.

Fabric D, cut
- (2) 2 ½" x WOF strips
  Subcut (28) 2½" x 2½" squares.

Fabric E, cut
- (2) 2½" x WOF strips.
  Subcut (28) 2½" x 2½" squares.

Fabric F, cut
- (5) 1" x WOF strips.
  Subcut (8) 1" x 9½" and (8) 1" x 14½".
- (8) 2¼" x WOF strips. Miter short ends together, trim and press open. Press strip in half length-wise with wrong sides together. BINDING.

Fabric G, cut
- (2) 16" x WOF strips. Subcut (4) 16" x 20" BACKING.

SEWING INSTRUCTIONS

All seams are sewn with a ¼" seam allowance. Press seams toward the darker fabric, unless otherwise stated.

1. Sew the 1" x 9½" Fabric F strips to the left and right sides of the 9½" x 13½" Fabric A rectangles.

2. Sew the 1" x 14½" Fabric F strips to the top and bottom of Fabric A.

3. Using the 2½" squares and following the color placement in Figure 1, sew the squares together to make 4 of each Block Border.

4. Sew short Block Borders to the left and right sides of Fabric F. Press toward Fabric F.

5. Repeat with long Block Borders on the top and bottom of Fabric F. Press toward Fabric F.

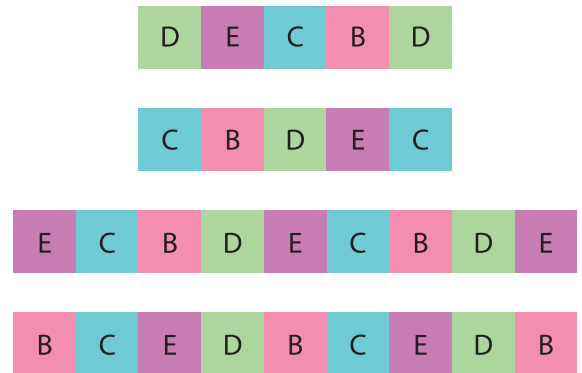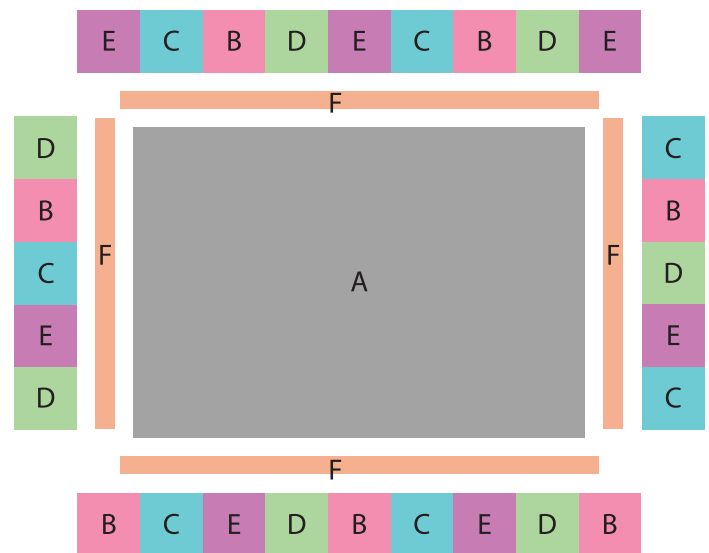6. Layer, quilt, trim edges even and bind.

Figure 1

Figure 2

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.