

# SEW & GO XVI



Finished size approximately 9 1/4" square

**INSTRUCTIONS:** Read through all instructions before starting.  
**NOTIONS:** 1 yd. medium weight interfacing (22" wide) or flat batting.  
**SEAM ALLOWANCE:** 1/4" unless otherwise specified.  
**NOTE:** Book cover is slightly larger than book pages.

1. Cut all page sections on outer line. You will have 8 page sets to create 3 book sections.
2. Use the book cover as a pattern to cut 3 layers of interfacing or batting.
3. With right sides together (RST) place: Book cover with page 1-10 (RST) over batting. Pin or baste before sewing. Diagram A. Page 9-2 with page 3-8 (RST) over batting. Pin or baste before sewing. Diagram B. Page 7-4 with page 5-6 (RST) over batting. Pin or baste before sewing. Diagram C.
4. Stitch a 1/4" seam around the book pages leaving a 4" opening for turning as indicated on the diagrams. Clip corners and trim extra batting. Remove all pins. Turn right side out. Press each book section and slip-stitch each opening closed.

5. When you have completed 3 book sections, assemble in the following manner:  
 Place book cover open on a flat surface with page 1-10 facing up.  
 Place page section 9-2 and 3-8 combination flat on top of 1-10 section. Page 3-8 will face up.  
 Place remaining page section 7-4 and 5-6 combination flat on top of the other 2 sections. Page 5-6 will face up.  
 6. Staple down center of book through all thicknesses to secure pages. Machine stitch on same center line (Diagram D). Remove basting stitches, if needed.

another great book from the library of QT fabrics




Two sizes!  
 Large = 17 1/2" x 12 1/2" x 8"  
 Small = 15 1/2" x 11" x 7"

Use this panel to sew a quick, boxy tote instead!  
 \*instructions NOT included



Images without patterns indicated are for inspiration only. Similar projects may be found online.



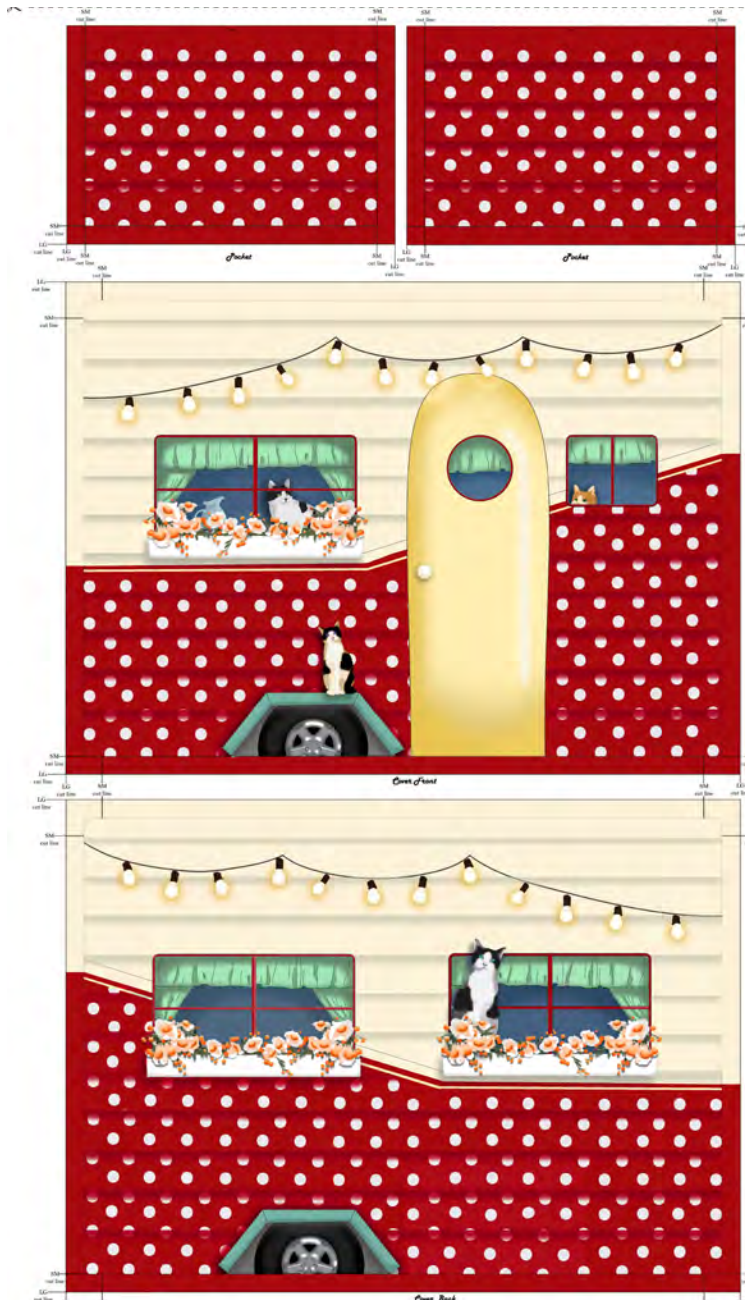

Large size: 17.5" x 12.5" x 8"  
Small size: 15.5" x 11" x 7"

**Instructions:**

**Preparation:**

1. Measure sewing machine to determine if it requires the large size or the small size.
2. Iron on fusible interfacing to front, back, top, and gusset pieces. Do not iron on to pockets or handle.
3. For large size, cut pattern pieces on outer black lines marked "LG cut line" in a straight line.
4. For small size, cut across pattern pieces at black dashes marked "SM cut line" in a straight line.
5. Seam allowance should be 1/4" unless specified otherwise.


**Pockets:**

1. Press top edge of each pocket piece 1/2" toward wrong side. Press under 1/2" again and topstitch them.
2. Place one pocket piece on bottom of each side gusset, matching horizontal "sliding" lines, making sure the bottom of the pocket matches up with the bottom of the side gusset. Baste side and bottom edges. Stitch one or two vertical divider lines through pockets as desired.


**Body:**

1. Fold handle in half lengthwise, right side in with 1/2" seam allowance. Stitch one end and long side, leaving an opening inside for turning as indicated. Turn right side out, press. Turn under raw edge 1/2" and topstitch to close.
2. Center handle by matching up ends with yellow dots on cover top making sure to cover dots so that they are not showing. The handle should form a slight arch. Pin in place. Stitch a rectangle on each end of handle, overlapping end of stitching over beginning, backstitch to secure stitching.
3. With right sides together, stitch top of cover front and top of cover back to the long sides of cover top. Start and stop stitching at seam allowances and backstitch to secure seam.
4. Pin side gusset to front and top pieces with right sides together making sure that all of the "sliding" lines match up. Sew around all printed sides of gusset stopping at each corner to turn fabric.
5. Press bottom edge 1/2" toward wrong side. Press under 1/2" again and topstitch them.


**Vintage Camper**  
Sewing Machine Cover

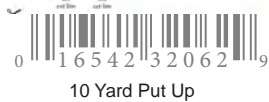

27637 R Vintage Sewing Machine Cover (36")

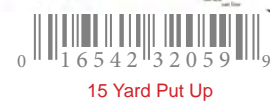

**INSTRUCTIONS:** Read through all instructions before starting.  
**NOTIONS:** 1 yd. medium weight interfacing (22" wide) or fat basting Thread  
**SEAM ALLOWANCE:** 1/4" unless otherwise specified  
**NOTE:** Book cover is slightly larger than book pages.

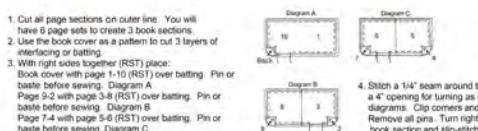

5. When you have completed 3 book sections, assemble in the following manner:  
Place book cover open on a flat surface with page 1-10 facing up.  
Place page section 9-2 and 3-8 combination flat on top of 1-10 section. Page 3-8 will face up.  
Place remaining page section 7-4 and 5-6 combination flat on top of the other 2 sections. Page 5-6 will face up.  
6. Baste down center of book through all thicknesses to secure pages. Machine stitch on same center line (Diagram D). Remove basting stitches, if needed.



28890 X Rainbow Zebra Book Panel (36")

