
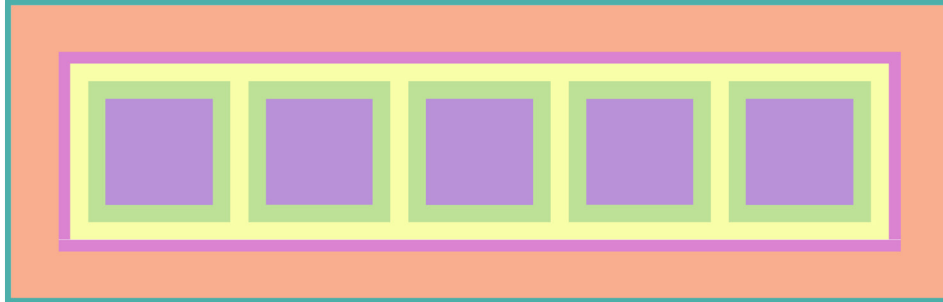


52½" x 16½"

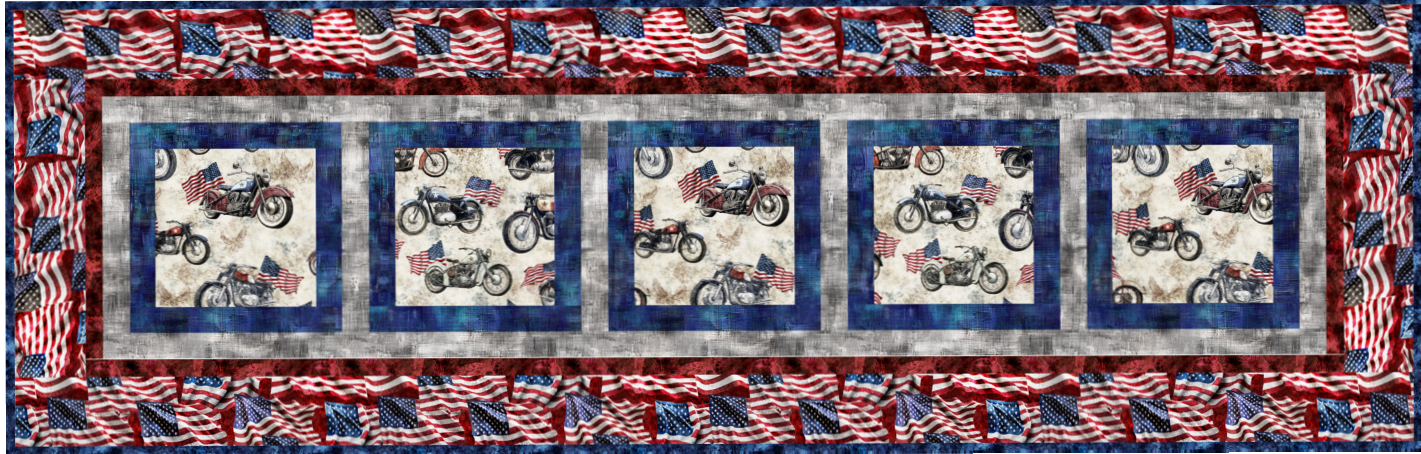

## FABRIC REQUIREMENTS

	<b>Fabric A</b> 31697 E  $\frac{1}{3}$ YARD		<b>Fabric B</b> 31679 K  $\frac{1}{4}$ YARD Interwoven		<b>Fabric C</b> 31698 R  $\frac{1}{2}$ YARD		<b>Fabric D</b> 31679 BW  $\frac{1}{3}$ YARD Interwoven
	<b>Fabric E</b> 31699 R  $\frac{1}{8}$ YARD		<b>Fabric F</b> 31699 N  $\frac{3}{8}$ YARD*		<b>Suggested Backing</b> 31696 A  $1\frac{1}{2}$ YARDS	* includes Binding	

We recommend that you carefully read through all instructions before getting started on your project.

## CUTTING DIRECTIONS

### Note:

WOF = width of fabric from selvage to selvage.  
Label pieces with the fabric letter. Remove as little fabric as possible when trimming selvages from WOF strips.

### Fabric A, cut:

- (1) 6½" x WOF strip.  
Subcut into (5) 6½" squares.

### Fabric B, cut:

- (2) 1½" x WOF strips.  
Subcut into (6) 1½" x 8½" rectangles and  
(1) 1½" x 20" strip for borders.
- (2) 1½" x WOF strips for borders.

### Fabric C, cut:

- (1) ¾" x WOF strip.  
Subcut into (2) ¾" x 11" rectangles for borders.
- (3) ¾" x WOF strips for borders.

### Fabric D, cut:

- (5) 1½" x WOF strips.  
Subcut into (10) 1½" x 6½" and  
(10) 1½" x 8½" rectangles.

### Fabric E, cut:

- (1) 1" x WOF strip.  
Subcut into (2) 1" x 10½" rectangles and  
(1) 1" x 21" strip for borders.
- (2) 1" x WOF strips for borders.

### Fabric F, cut:

- (4) 2¼" x WOF strips for binding.


### Binding fabric, cut:

- (2) 24" x WOF pieces.

## RUNNER ASSEMBLY


Use a ¼" seam allowance for all stitching.  
Refer to the exploded runner diagram on next page as needed throughout the following steps.

**1.** Sew 1½" x 6½" **Fabric D** rectangles to opposite sides of each 6½" **Fabric A** square to make 5 A units. Press seams toward rectangles. Sew 1½" x 8½" **Fabric D** rectangles to the top and bottom of each A unit to complete (5) 8½" x 8½" blocks. Press seams toward the rectangles.

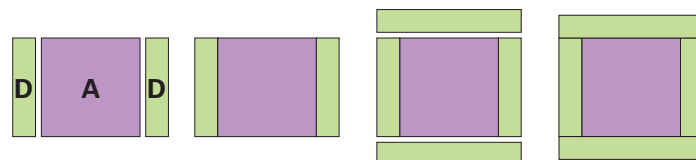

**2.** Join the blocks with 4 of the 1½" x 8½" **Fabric B** rectangles to complete the 8½" x 44½" runner center. Press seams toward the **Fabric B** rectangles.

**3.** Sew 1½" x 8½" **Fabric B** rectangles to the ends of the runner center. Press seams toward the rectangles. Sew 1½" x WOF and 1½" x 20" **Fabric B** strips short ends together to make a long strip. Press seams to 1 side. Cut into (2) 1½" x 46½" strips. Sew to opposite long sides of the runner center. Press seams toward the strips.

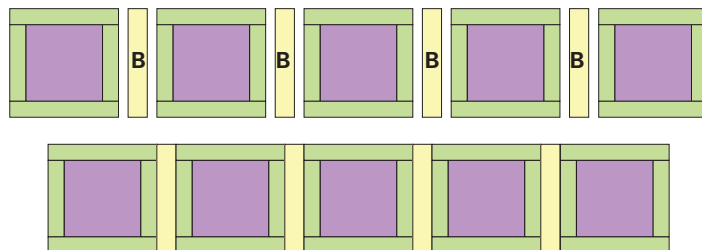


**4.** Sew 1" x 10½" **Fabric E** rectangles to opposite ends of the runner center. Press seams toward rectangles. Sew the 1" x WOF and 1" x 21" **Fabric E** strips short ends together to make a long strip. Press seams to 1 side. Cut into (2) 1" x 47½" strips. Sew to opposite long sides of the runner center. Press seams toward strips.

5. Sew  $3\frac{1}{4}$ " x  $11\frac{1}{2}$ " **Fabric C** rectangles to opposite ends of the runner center. Press seams toward strips. Sew (2)  $3\frac{1}{4}$ " x WOF **Fabric C** strips short ends together to make a long strip. Press seams to 1 side. Cut into (2)  $3\frac{1}{4}$ " x 53" strips. Sew to opposite long sides of the runner center to complete the runner top. Press seams toward strips.

## FINISHING

1. Remove the selvage edges from the backing pieces. Join on the 24" edges with a  $\frac{1}{2}$ " seam allowance. Press seam open. Trim to make a 60 x 24" backing piece.
2. Layer the backing, a 60" x 24" batting piece and the top. Pin or baste to hold.
3. Quilt as desired. Trim batting and backing even with the top.
4. Make double-fold binding using the **Fabric F** binding strips. Bind the edges of the runner using your preferred method to complete the quilt.

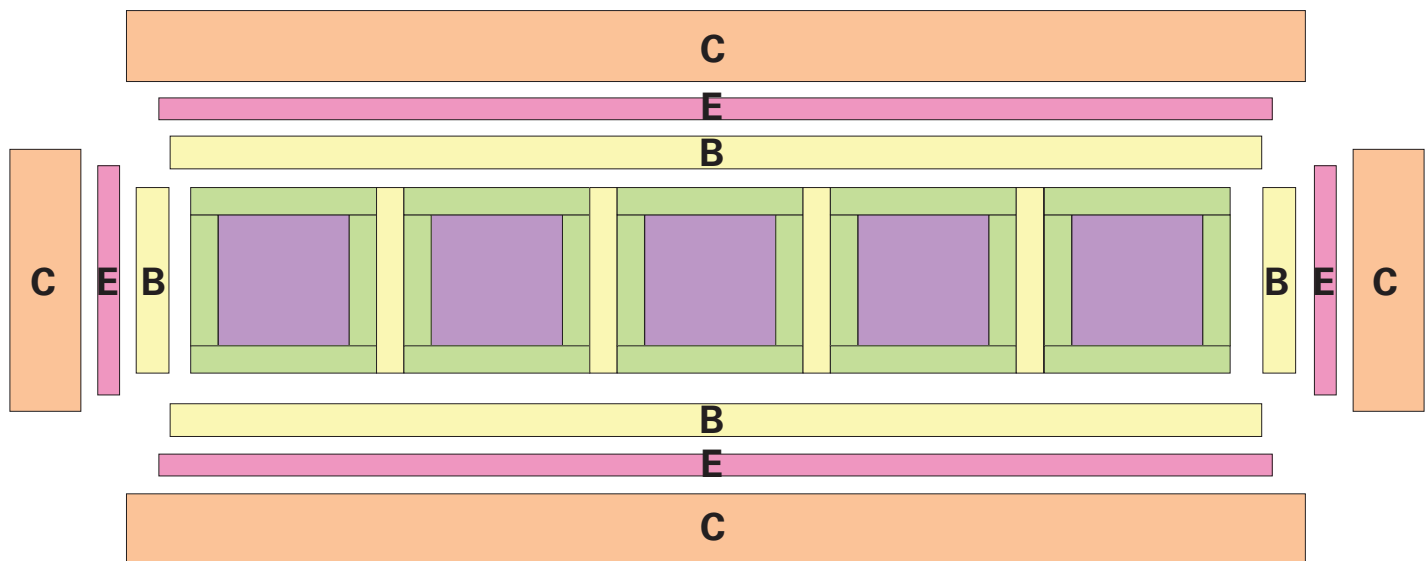

Exploded Runner Diagram

*While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.*