











52½" x 16½"

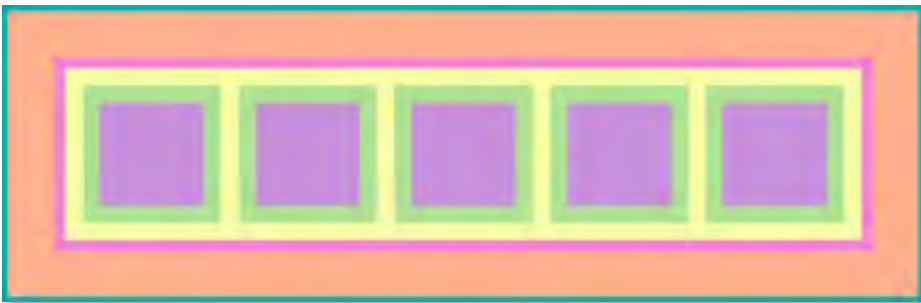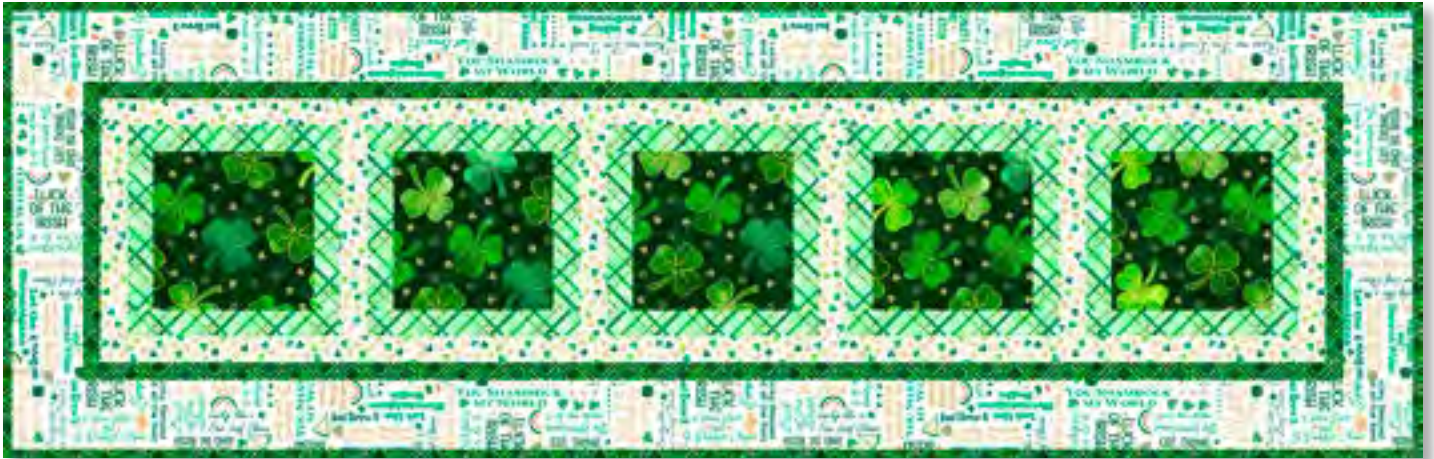

FABRIC REQUIREMENTS

	Fabric A 30822 F ⅓ YARD 1 BOLT		Fabric B 30825 Z ¼ YARD 1 BOLT		Fabric C 30823 Z ½ YARD 1 BOLT		Fabric D 30824 H ⅓ YARD 1 BOLT
	Fabric E 30824 G ⅛ YARD 1 BOLT		Fabric F 30824 G ⅜ YARD* 1 BOLT		Suggested Backing 30822 Z 1½ YARDS 2 BOLTS	* includes Binding	

 Information within gray box = Number of Bolts needed to make 12 Kits

We recommend that you carefully read through all instructions before getting started on your project.

CUTTING DIRECTIONS

Note:

WOF = width of fabric from selvage to selvage.
Label pieces with the fabric letter. Remove as little fabric as possible when trimming selvages from WOF strips.

Fabric A, cut:

- (1) 6½" x WOF strip.
Subcut into (5) 6½" squares.

Fabric B, cut:

- (2) 1½" x WOF strips.
Subcut into (6) 1½" x 8½" rectangles and
(1) 1½" x 20" strip for borders.
- (2) 1½" x WOF strips for borders.

Fabric C, cut:

- (1) ¾" x WOF strip.
Subcut into (2) ¾" x 11" rectangles for borders.
- (3) ¾" x WOF strips for borders.

Fabric D, cut:

- (5) 1½" x WOF strips.
Subcut into (10) 1½" x 6½" and
(10) 1½" x 8½" rectangles.

Fabric E, cut:

- (1) 1" x WOF strip.
Subcut into (2) 1" x 10½" rectangles and
(1) 1" x 21" strip for borders.
- (2) 1" x WOF strips for borders.

Fabric F, cut:

- (4) 2¼" x WOF strips for binding.


Binding fabric, cut:

- (2) 24" x WOF pieces.

RUNNER ASSEMBLY



Use a ¼" seam allowance for all stitching.
Refer to the exploded runner diagram on next page as needed throughout the following steps.

1. Sew 1½" x 6½" **Fabric D** rectangles to opposite sides of each 6½" **Fabric A** square to make 5 A units. Press seams toward rectangles. Sew 1½" x 8½" **Fabric D** rectangles to the top and bottom of each A unit to complete (5) 8½" x 8½" blocks. Press seams toward the rectangles.

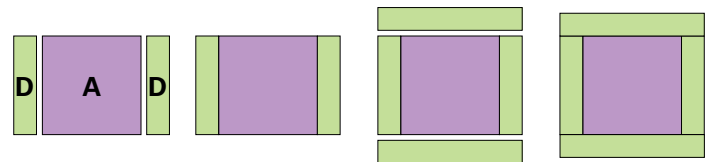

2. Join the blocks with 4 of the 1½" x 8½" **Fabric B** rectangles to complete the 8½" x 44½" runner center. Press seams toward the **Fabric B** rectangles.

3. Sew 1½" x 8½" **Fabric B** rectangles to the ends of the runner center. Press seams toward the rectangles. Sew 1½" x WOF and 1½" x 20" **Fabric B** strips short ends together to make a long strip. Press seams to 1 side. Cut into (2) 1½" x 46½" strips. Sew to opposite long sides of the runner center. Press seams toward the strips.




4. Sew 1" x 10½" **Fabric E** rectangles to opposite ends of the runner center. Press seams toward rectangles. Sew the 1" x WOF and 1" x 21" **Fabric E** strips short ends together to make a long strip. Press seams to 1 side. Cut into (2) 1" x 47½" strips. Sew to opposite long sides of the runner center. Press seams toward strips.

5. Sew $3\frac{1}{4}$ " x $11\frac{1}{2}$ " **Fabric C** rectangles to opposite ends of the runner center. Press seams toward strips. Sew (2) $3\frac{1}{4}$ " x WOF **Fabric C** strips short ends together to make a long strip. Press seams to 1 side. Cut into (2) $3\frac{1}{4}$ " x 53" strips. Sew to opposite long sides of the runner center to complete the runner top. Press seams toward strips.

FINISHING

1. Remove the selvage edges from the backing pieces. Join on the 24" edges with a $\frac{1}{2}$ " seam allowance. Press seam open. Trim to make a 60 x 24" backing piece.
2. Layer the backing, a 60" x 24" batting piece and the top. Pin or baste to hold.
3. Quilt as desired. Trim batting and backing even with the top.
4. Make double-fold binding using the **Fabric F** binding strips. Bind the edges of the runner using your preferred method to complete the quilt.

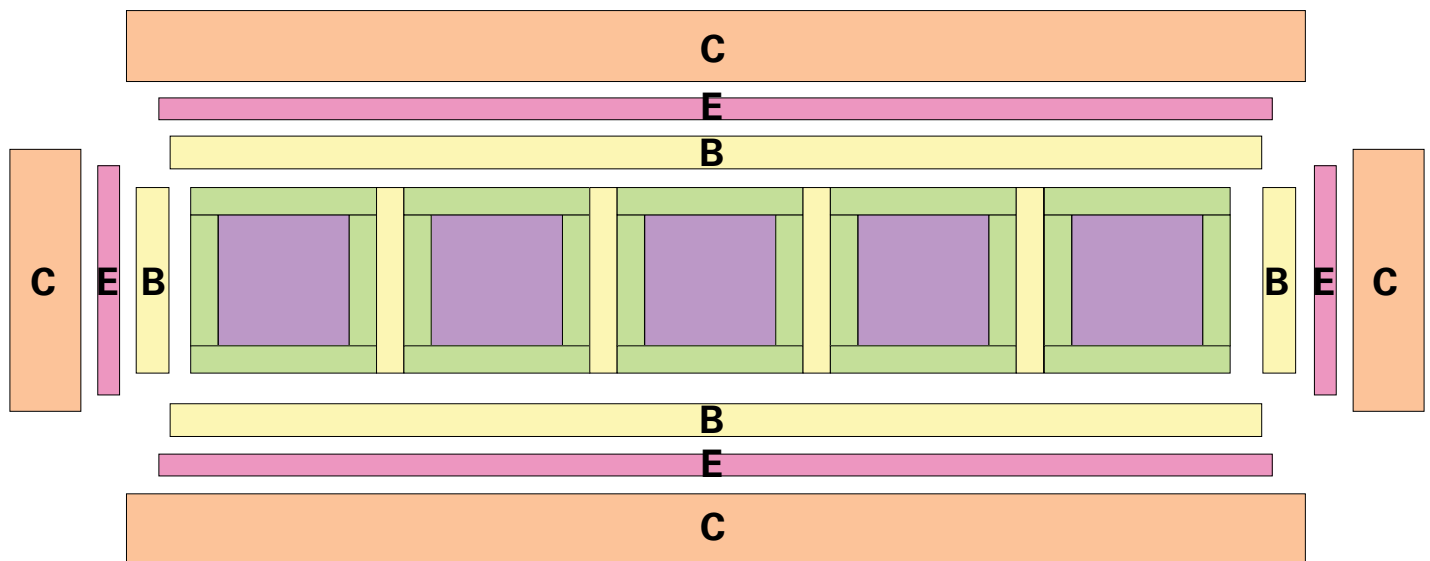

Exploded Runner Diagram

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.