

46" x 60"



Designed by: QT Fabrics

Robert J. May



Finished Size: 46" x 60"

FABRIC REQUIREMENTS

	Fabric A 29482 F (1) panel		Fabric B* 29486 H		Fabric C 23528 A ¼ YARD		Fabric D 23528 F ½ YARD
	Fabric E 29485 F ½ YARD		Fabric F 29484 F ¾ YARD		Fabric G** 29485 E 3 YARDS	* includes binding ** backing only	

We recommend that you carefully read through all instructions before starting your project.

CUTTING DIRECTIONS

Note:

WOF= Width of Fabric (perpendicular to the selvages).

Fabric A

- Trim panel to 23½" x 42½".

Fabric B

- Cut (4) 1¾" x WOF strips.
Subcut into (2) 1¾" x 40½" strips,
(2) 1¾" x 23½" strips and (2) 1¾" x 5" strips.
- Cut (6) 2½" x WOF strips for binding.

Fabric C

- Cut (4) 1¾" x WOF strips.
Subcut into (2) 1¾" x 40½" strips,
(2) 1¾" x 26" strips and (2) 1¾" x 7½" strips.

Fabric D

- Cut (7) 1¾" x WOF strips.
Subcut into (4) 1¾" x 40½" strips,
(2) 1¾" x 28½" strips, (2) 1¾" x 20" strips and
(2) 1¾" x 10" strips.

Fabric E

- Cut (9) 1¾" x WOF strips.
Subcut into (4) 1¾" x 40½" strips,
(2) 1¾" x 31" strips, (2) 1¾" x 20" strips and
(2) 1¾" x 12" strips.

Fabric F

- Cut (3) 4½" x WOF strips.
Subcut into (2) 4½" x 40½" strips and
(2) 4½" x 20" strips.
- Cut (2) 4¼" x WOF strips.
Subcut into (2) 4¼" x 33½" strips.

Fabric G

- Cut (2) 52" x WOF pieces for backing.

CONSTRUCTION

All measurements include ¼" seam allowances.

1. Sew (1) 1¾" x 40½" **Fabric B** strip to (1) 1¾" x 5" **Fabric B** strip to make (1) 1¾" x 45" **Fabric B** strip. Make 2 units.
2. Sew (1) 1¾" x 40½" **Fabric C** strip to (1) 1¾" x 7½" **Fabric C** strip to make (1) 1¾" x 47½" **Fabric C** strip. Make 2 units.
3. Sew (1) 1¾" x 40½" **Fabric D** strip to (1) 1¾" x 10" **Fabric D** strip to make (1) 1¾" x 50" **Fabric D** strip. Make 2 units.
4. Sew (1) 1¾" x 40½" **Fabric D** strip to (1) 1¾" x 20" **Fabric D** strip to make (1) 1¾" x 60" **Fabric D** strip. Make 2 units.
5. Sew (1) 1¾" x 40½" **Fabric E** strip to (1) 1¾" x 12" **Fabric E** strip to make (1) 1¾" x 52½" **Fabric E** strip. Make 2 units.
6. Sew (1) 1¾" x 40½" **Fabric E** strip to (1) 1¾" x 20" **Fabric E** strip to make (1) 1¾" x 60" **Fabric E** strip. Make 2 units.
7. Sew (1) 4½" x 40½" **Fabric F** strip to (1) 4½" x 20" **Fabric F** strip to make (1) 4½" x 60" **Fabric F** strip. Make 2 units.

QUILT ASSEMBLY


Refer to the Quilt Assembly Diagram for the following steps.

1. Sew the 1¾" x 23½" **Fabric B** strips to the top and bottom of the 23½" x 42½" **Fabric A** Panel, followed by the 1¾" x 45" **Fabric B** strips to the sides.
2. Sew the 1¾" x 26" **Fabric C** strips to the top and bottom of the quilt center, followed by the 1¾" x 47½" **Fabric C** strips to the sides.
3. Sew the 1¾" x 28½" **Fabric D** strips to the top and bottom of the quilt center, followed by the 1¾" x 50" **Fabric D** strips to the sides of the quilt center.
4. Sew the 1¾" x 31" **Fabric E** strips to the top and bottom of the quilt center, followed by the 1¾" x 52½" **Fabric E** strips to the sides of the quilt center.

5. Sew the 4¼" x 33½" **Fabric F** strips to the top and bottom of the quilt center, followed by the 4½" x 60" **Fabric F** strips to the sides of the quilt center.
6. Sew together (1) 1¾" x 60" **Fabric E** strip and (1) 1¾" x 60" **Fabric D** strip along one long side. Repeat for the second set of 1¾" x 60" **Fabric E** and **Fabric D** strips. Press.
7. Sew (2) 1¾" x 60" **Fabric E/D** strips to the sides of the quilt center. Press.

FINISHING

1. Sew the 52" x WOF **Fabric G** pieces together along their 54" length to make backing.
2. Layer backing, batting, and quilt top; baste.
3. Quilt as desired.
4. Make double-fold binding using the 2½" wide **Fabric B** strips, and sew the binding to the quilt using your preferred method.

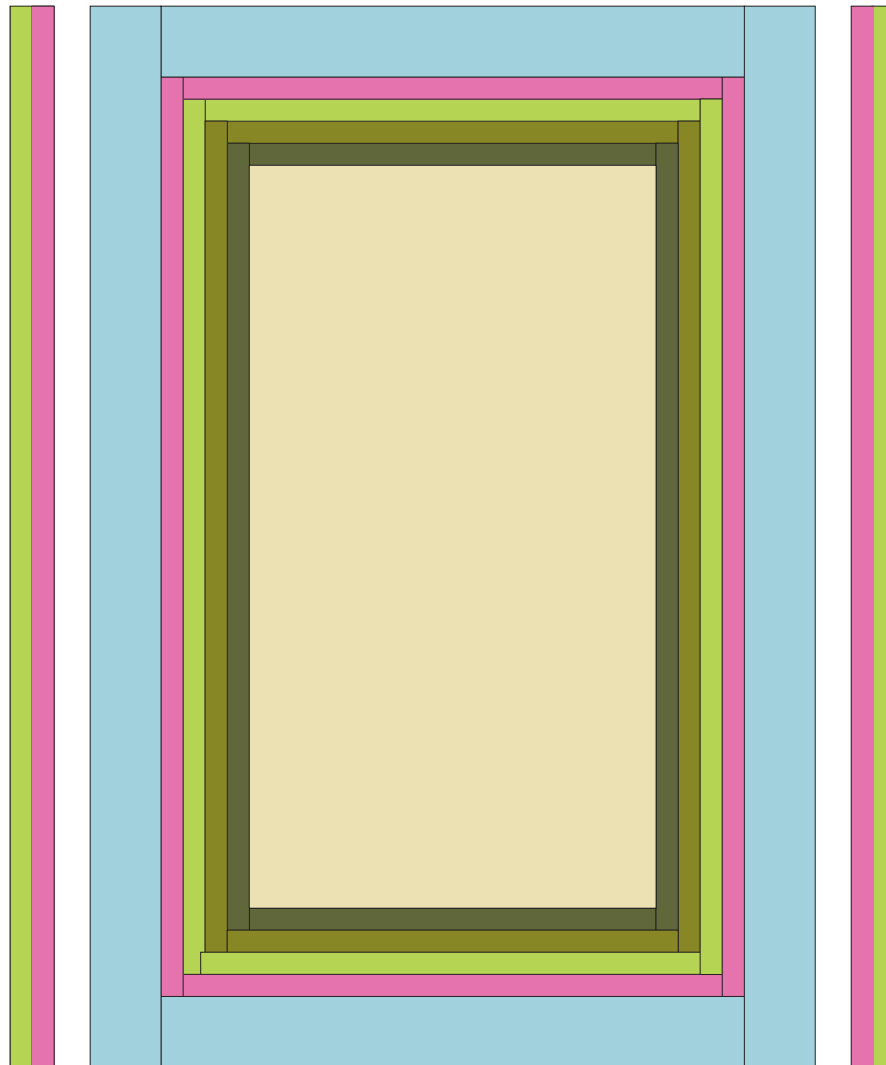

Quilt Assembly

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.